

# Velcro and double side tape laminating and coiling machine ES-133

#### **【Product Description】**

The velcro and double side tape laminating and coiling machine ES-133 is designed for automatic laminating velcro and double side tapes and coiling

them into roll form , the best advantage of this machine is that the winding release speed matches with winding collection speed , this ensures the lamination

material had little medium tension and not much pulling during lamination process .





The maximum laminating width is 300mm for this velcro with double side tape press on and winding machine and as it applies with double lamination roller ,it ensures good adhesion of velcro material with double side tapes . the laminating pressure is adjustable between velcro and double side tapes according to different thickness material .

The velcro with 3m tape laminating and winding machine laminate and wind velcro and double side tapes from roll to roll which saves labour and machine laminating speed is adjustable according to production requirements.

#### 【Technical Data】

Product name: Velcro and double sid tape laminating winding machine

Model No.: ES-133

Function: Laminate velcro and double side tapes and wind into roll form

Voltage: 110V/220V

Machine power: 480W

Motor type: Speed reducer stepping motor

Lamination roller material: PU

Lamination mechanism: Double lamination roller to laminate velcro and double side tapes, lamination pressure adjustable.

Maximum winding material OD:300mm

Velcro Winding ID:75mm (can be customised)

Maximum laminating material width: 300mm

Machine productivity: 20 meters /Min

Machine Net Weight: 112KG

Machine size: L\*W\*H = 130\*95\*115CM

Add:Room 103, Building 8th, Dacheng Industrial Zone, Buji Street, Longgang District, Shenzhen, China

Mobile phone: +86-188 1188 0172

Email:sales@cnesmai.com Website:www.chesmai.com



#### 【Product Advantage】

1, Double laminating rollers to laminate and ensure good adhesion between velcro and double side tapes , adjustable lamination pressure .

Roll to roll from laminating to get winded in roll form

- 2,Big laminating width of 300 mm, wide application to other material lamination as well /.
- 3,Ensuring Winding roll release and winding roll collection speed are the same by the speed reduce motor and expansion equipment


#### **(Product Details)**

**1,Roll to roll**, the velcro roll is placed on downside of velcro release roller and double side tape on upper release roller

the velcro and double side tapes are joined by the double lamination roller and winded and collected into roll form

in collection roller , it is from roll to roll and save labour to wind into roll form .



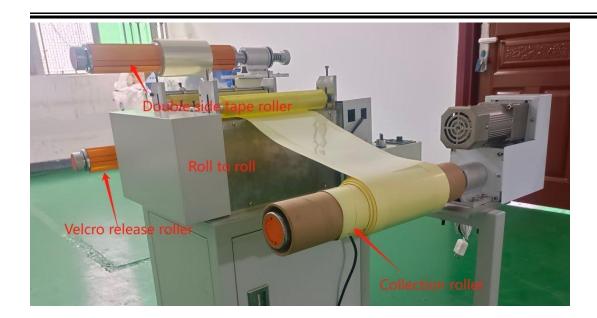

**2,Air blooming winding roller**, the velcro with 3m tape joining and winding machine applies with air blooming winding roller

which the winding roller can be expanded in size to squeeze fitness with velcro paper core . the winding roller OD is 75 mm

and can be customised if necessary.





**3, Speed reduce motor**, the speed reduce motor of the velcro with double side tape press on and winding machine can ensure the winding roller release speed matches with the winding roller collection speed to ensure the here is not much pullling tension of the laminating material and not too loose status.

Add:Room 103, Building 8th, Dacheng Industrial Zone, Buji Street, Longgang District, Shenzhen,China Mobile phone: +86-188 1188 0172
Email:sales@cnesmai.com Website:www.chesmai.com






**4,Lamination roller**, the velcro with 3m tape joining and winding machine applies double lamination roller to

ensure good adhesion of velcro and double side tapes ,the laminating pressure can be also adjusted based on the thickness of velcro .

Add:Room 103, Building 8th, Dacheng Industrial Zone, Buji Street, Longgang District, Shenzhen, China Mobile phone: +86-188 1188 0172
Email:sales@cnesmai.com Website:www.chesmai.com



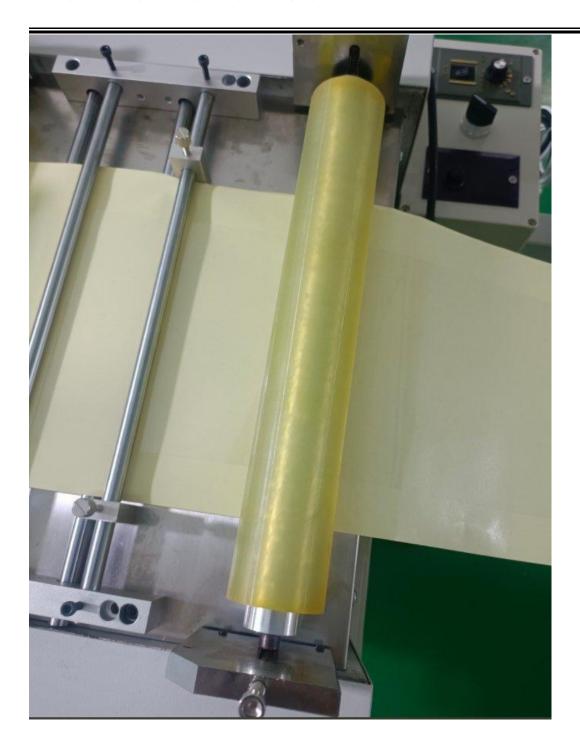

**Front View** 





**Side View** 





**Side View** 





#### [Warranty]

As a velcro and double side tape laminating and coiling machine supplier, all the spare parts of the machine will have one year of free maintainance

by changing the spare parts for free and free shipping of spare parts to overseas clients starting from the issuing date of commercial invoice

after on line diagnosis.

Add:Room 103, Building 8th, Dacheng Industrial Zone, Buji Street, Longgang District, Shenzhen, China Mobile phone: +86-188 1188 0172

Email:sales@cnesmai.com Website:www.chesmai.com



ľ	Pa	cki	ing	1
	10	CIN	шz	

1Set/Wooden case ,foam paddings will be put inside wooden case for safe overseas shipping